

BP-10



MAX DISCHARGE
11 Gpm (44 Lpm)

SIZE, MATERIAL
2" - 2-1/2"

WEIGHT
11.66bs (5.3 Kgs)

"VALUE FOR MONEY"

PNEUMATIC BARREL PUMP

Teryair Pneumatic Centrifugal Pumps are used to empty ballast tanks, bilge wells, and many other operations. Often used for draining cargo holds during and after the washing procedure. Teryair Centrifugal pumps have a small cross-section and hence can be lowered into areas having small access hatches. Especially preferred where aneclectic spark may risk ignition or explosion.



Versatility

This pump handles viscous fluids, slurries, solid laden fluids, shear sensitive fluids very well.


No priming needed.
No foaming of fluid pumped.
No stall damages



Approvals and Certifications


All Teryair Barrel pumps are CE marked and manufactured under an ISO 9001:2015 Quality system – SGS.

Performance Graph

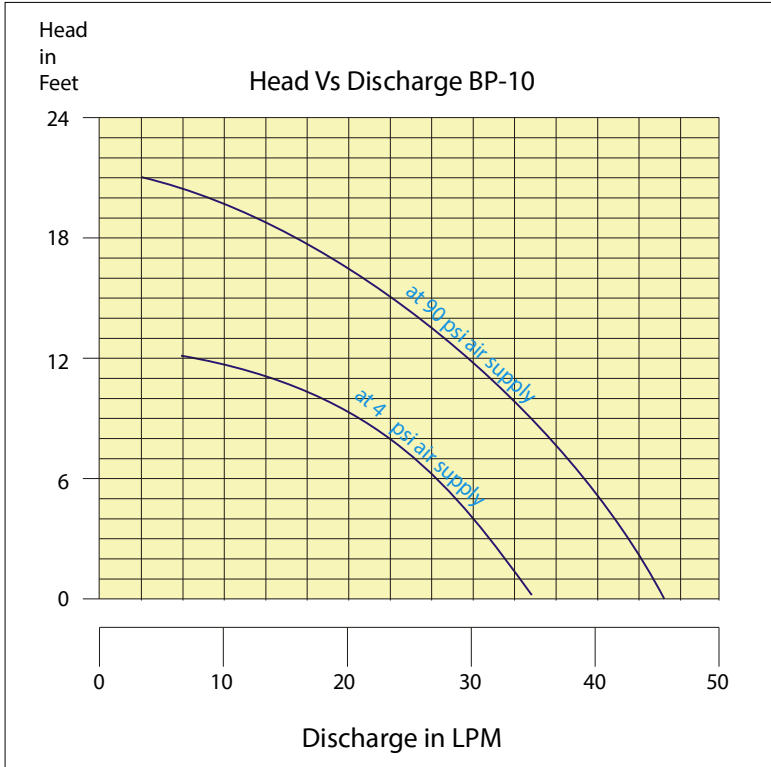

BP-10

Schematic illustration of Teryair Barrel Pump

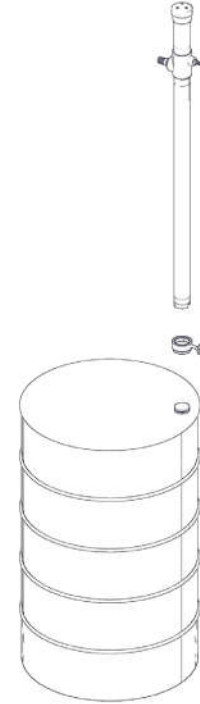

BP 10 showing bung adaptor & insertion method into standard 210 liter drums

Teryair Model No	BP-10
IMPA Number equivalent	59 16 53
Tube Diameter	2" (55 mm)
Air inlet	1/4" NPT
Fluid Outlet	3/4" NPT
Gpm (Lpm)	11 Gpm (44 Lpm)
Air Consumption, m ³ /min	0.27
Weight, Lbs (Kgs)	11.66 Lb (5.3 Kgs)

- Can be inserted into most barrels.
- Will operate over a range of air inlet pressures